





7 Ruscitti Road
 New Windsor, New York, 12553
 www.arconcrete.com
 845-562-0640

NYSDOT Standard Drainage Units Types "A" thru "P"

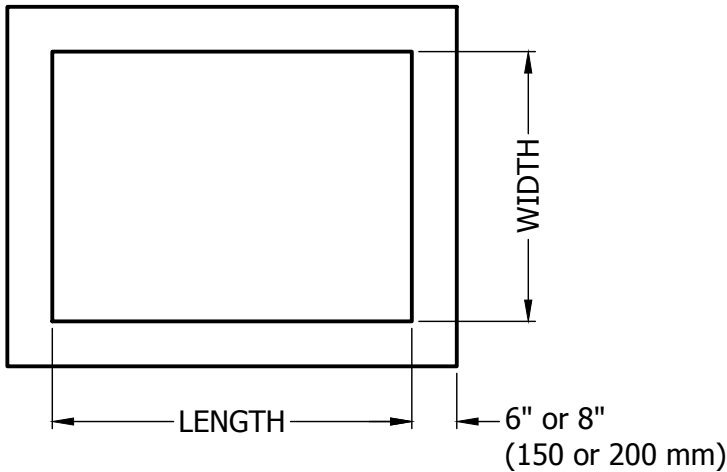

PLAN

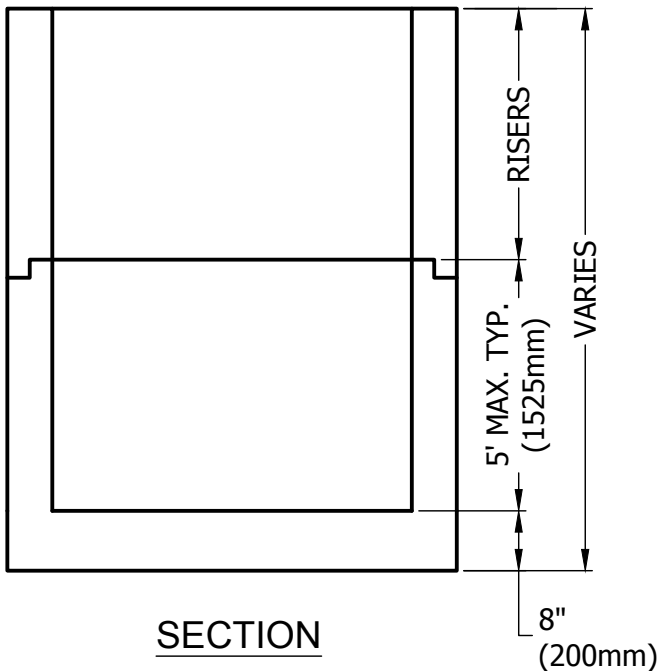

SECTION

RECTANGULAR DRAINAGE STRUCTURE TYPE "A" thru "P"		
TYPE	WIDTH	LENGTH
A	36"	36"
B	48"	36"
C	60"	36"
D	80"	36"
E	36"	48"
F	48"	48"
G	60"	48"
H	80"	48"
I	36"	60"
J	48"	60"
K	60"	60"
L	80"	60"
M	36"	80"
N	48"	80"
O	60"	80"
P	80"	80"

RECTANGULAR DRAINAGE STRUCTURE TYPE "A" thru "P" (mm)		
TYPE	WIDTH	LENGTH
A	915	36"
B	1220	36"
C	1525	36"
D	2030	36"
E	915	1220
F	1220	1220
G	1525	1220
H	2030	1220
I	915	1525
J	1220	1525
K	1525	1525
L	2030	1525
M	915	2030
N	1220	2030
O	1525	2030
P	2030	2030

- * Concrete to test 4000 PSI at 28 days.
- * All components are designed to withstand AASHTO HS-20 loading.
- * All materials are in conformance with NYSDOT 706-04 specifications and materials.
- * Pipe openings, size and location, as specified.
- * Frame and grates available upon request.
- * See drg. NYSDOT 3 for available cover slabs.